


54 31 185 Removing and installing/replacing center mount for convertible top compartment floor



Necessary preliminary tasks:

- Remove [convertible top compartment base](#)

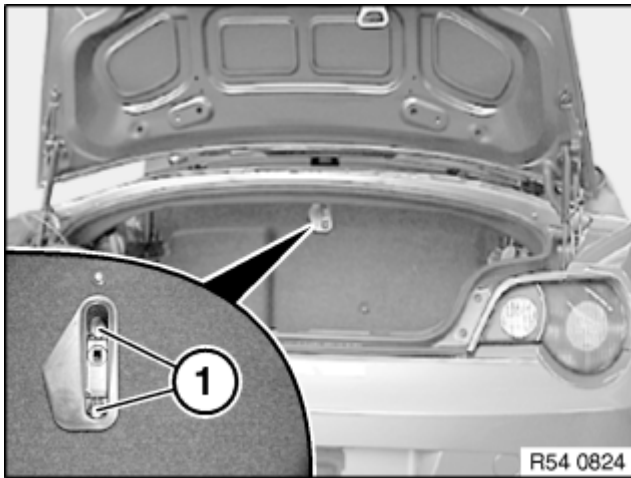

Loosen screws (1).

Carefully remove center mount towards rear and disconnect plug connection.



For replacement only:

- Remove [microswitch](#).