## 54 31 170 Removing and installing/replacing convertible top compartment floor




Necessary preliminary tasks:

- Close convertible top.
- Open rear lid.


## M Roadster only:

Remove M Mobility system

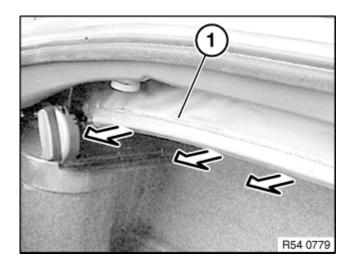

Move convertible top compartment floor downwards.

Feed cover (1) out of convertible top compartment floor towards rear.

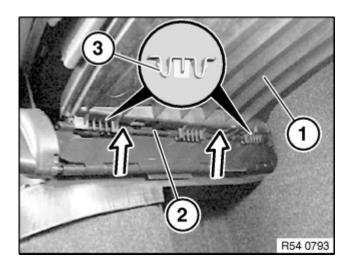


Unclip retainers (3).

Unclip convertible top compartment floor (1) upwards out of mounting (2).

## Installation:

- Move mounting (2) downwards
- Position convertible top compartment floor (1)
- Move mounting (2) upwards
- Clip in convertible top compartment floor (1) (press from passenger compartment)
- Clip in retainers (3)

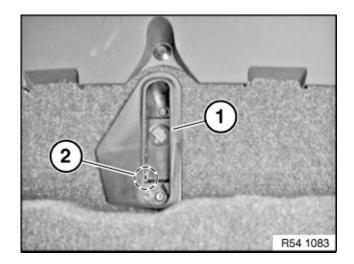

Remove convertible top compartment floor from centre mount (1).*Installation:*Insert convertible top compartment floor from above (above microswitch 2) into centre mount and

Check function of microswitch (2).

For informational purposes only. The information on this website is provided AS-IS with no warranties, express or implied, and is not guaranteed to be error-free, up-to-date or complete. NewTIS and BMW assume no liability for any loss or damage arising from the use or reliance on the information and content on this website. The content on this website is subject to change without notice.

lower.