


## 51 43 ... Removing and installing/replacing trim behind rollover bar on left or right

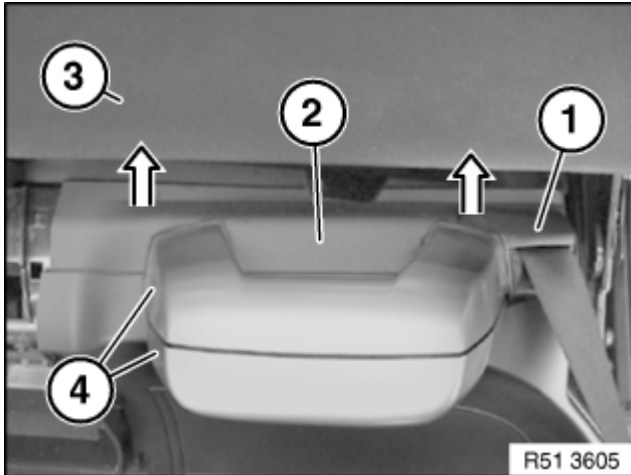


### Important!

With trim (2) removed, the convertible top (3) can be damaged by sharp edges in the area of the belt guide (1). Cover this area before actuating the convertible top (3).

Unlock convertible top (3), raise slightly and pull off trim (2) towards rear.

*Installation:* Feed in trim (2) below belt guide (1) and trim (4).

Make sure intermediate rings are correctly seated on trim (4).

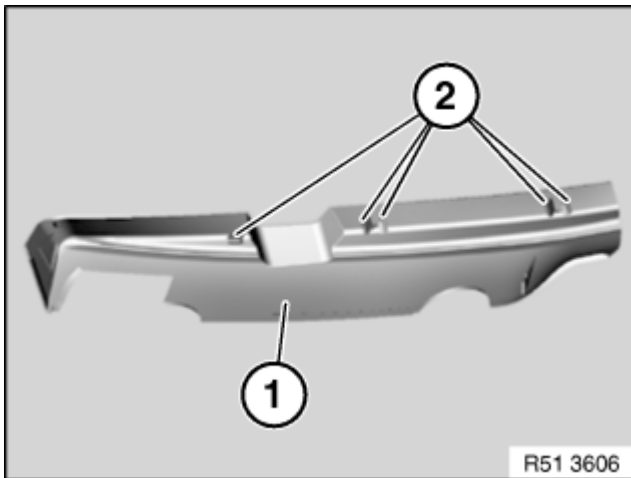

### *Installation:*

Retaining lugs (2) on trim (1) must not be damaged or missing.